

AM Loop System: M7000C

Specifications

• Environment

Operating temperature: 0~50°C
 Storage temperature : -4~60°C
 Relative humidity : 0~90% non-condensing

• Power Supply

Primary Inputs : 100~120 VAC@60Hz or
 200~240 VAC@50Hz
 Primary Power Fuse : 2A, 250V
 Maximum Current : 0.54A@120V and
 0.27A@240v
 Input power : <65W
 The power line must be grounded.

• Receiver

Input : 6
 Operating frequency : 58KHz +/-200Hz


• Buzzer, LED, CCTV

Output for connecting to external alarm,
 LED and CCTV

• Configuration

Standard 4 side transponders with optional
 floor transponders or floor antenna

- **Average detection:** Hard tag detection: 95%+
 DR label detection: limited

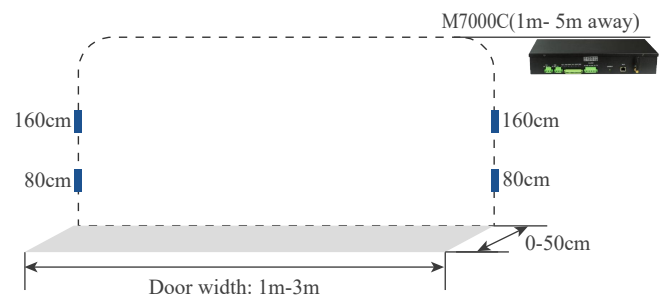

- **Wireless or Serial cable tuning:**

